

CIRCLE

**TF040-PLAFONNIER CIRCLE-24W-IP44-  
WHITE-4000K**

BL12246502

**INDOOR** > Indoor Bulkhead**INDOOR** > Surface mounted and suspended fixtures

Ceiling light / Porthole led IP44 24W for residential and community housing. Also suitable for technical rooms, sanitary facilities, storeroom, etc.

**Application domain**

- Home Cellar, House Technical Room
- Circulations areas
- Cloakrooms
- Washrooms
- Locaux techniques



24 W

2100  
lmIRC  
>80

IP44

4000K

G



FILE UPDATED ON 28/11/2022

## Electric data

Total power (W)	24
Rated voltage (V)	230V
Distorsion harmonique	<12%
Power factor	>0.9
Network frequencies	50Hz
Electric class	II
Dimmable	No

## Power supply data

Max. lamp per B10A circuit breaker	25
Max. lamp per B16A circuit breaker	30
Max. lamp per C16A circuit breaker	40

## Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>5
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	2100lm (4000K)
ULOR	-



FILE UPDATED ON 28/11/2022



## Technical data

Diameter (mm)	300
Height (mm)	72
Recessed diameter (mm)	-
Weight (kg)	0.92
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	White
IK Code	IK08
Incandescent wire test	850°C
IP Code	IP44
Use temperature range	-20... +45°
Body material	PC
Diffuser material	PC
Driver included	Yes

## Liefe time

L70 à 25°	35 000 h
-----------	----------

## Supplementary data


Warranty period	3 years
Light beam spread	115°
Tiltable	No
Connection type	Connecteur rapide avec repiquage




FILE UPDATED ON 28/11/2022



## Plan

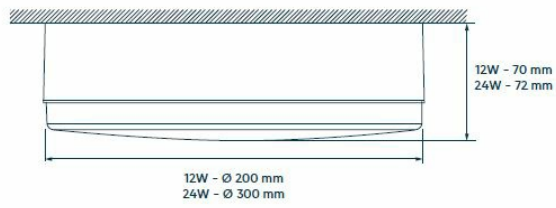

## Photometric curves

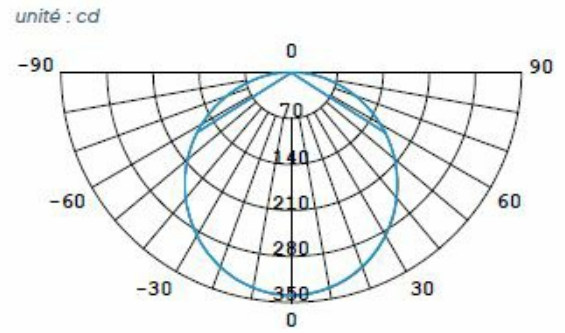

## Accessories



FILE UPDATED ON 28/11/2022

