

SLIM

TF071-SLIM ECO-18W-IP20-4000k-NON GRAD

BL02182001

INDOOR > Downlight (100 to 240 mm)

Low profile, economical downlight. Ideal for circulation and common areas Economical flat downlight with direct opal diffuser 230 Volts. economical low thickness. Ideal for circulation and common areas



Application domain

- Office
- Home Office
- Circulations areas
- Cloakrooms



18 W

1620
lmIRC
>85

IP20

4000K

F



FILE UPDATED ON 26/04/2023

Electric data

Total power (W)	18
Rated voltage (V)	230V
Distorsion harmonique	<8%
Power factor	>0.9
Network frequencies	50Hz
Electric class	II
Dimmable	No

Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>6
IRC	>85
Safety group (EN62778)	RG0
Luminous flux (lm)	1620lm (4000K)
ULOR	-



FILE UPDATED ON 26/04/2023



Technical data

Diameter (mm)	225
Height (mm)	24
Recessed diameter (mm)	Min. : 205 Max. : 215
Weight (kg)	0.36
Recessed depth under BA13 (mm)	30
Cable length	30 cm
Product color	White
IK Code	IK08
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	PC
Diffuser material	PC
Driver included	Yes
Recoverable	Non recouvrable

Liefe time

L70 à 25°	25 000 h
-----------	----------


Supplementary data

Warranty period	2 years
Light beam spread	110°
Tiltable	No
Connection type	fast connector



FILE UPDATED ON 26/04/2023



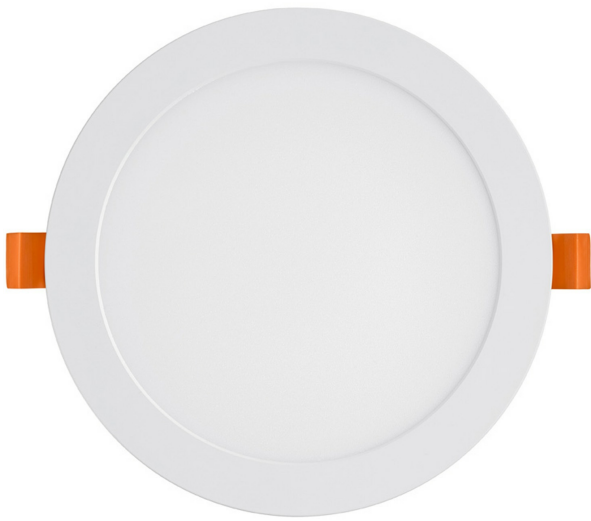

FILE UPDATED ON 26/04/2023