

STORM 4CCT

STORM ISO 4 CTT-6.5W-IP65-BBC-BLACK-BELED

BL01106551

INDOOR > Downlights (until 95 mm)

STORM ISO in aluminium, recessed compatible with BBC standard and adjustable. Coverable with roll insulation or blown insulation.



Application domain

- Residential indoor
- Meeting room
- Kitchen
- Bathroom
- Bedroom
- Home Office
- House Corridor
- Circulations areas
- Cloakrooms
- Washrooms
- Entrance Halls



6.5 W

500 lm

BBC

UGR
<19

IRC
>80

IP65
facade

4 CCT

2700K / 3000K
4000K / 6000K



FILE UPDATED ON 25/11/2022

Electric data

Total power (W)	6.5
Rated voltage (V)	230V
Distorsion harmonique	<20%
Power factor	>0.95
Network frequencies	50Hz
Electric class	II
Dimmable	Triac

Power supply data

Max. lamp per B10A circuit breaker	25
Max. lamp per B16A circuit breaker	30
Max. lamp per C16A circuit breaker	40

Photometric data

Color temperatures	2700K / 3000K / 4000K / 6000K
UGR	<19
Light source type	COB
Including the light source	Yes
SDCM	SDCM>5
IRC	>80
Safety group (EN62778)	RG1
Luminous flux (lm)	500lm (3000K)
ULOR	-



FILE UPDATED ON 25/11/2022



Technical data

Diameter (mm)	90
Height (mm)	40
Recessed diameter (mm)	Min. : 68 Max. : 74
Weight (kg)	0.24
Recessed depth under BA13 (mm)	30
Cable length	-
Product color	Black
IK Code	IK06
Incandescent wire test	650°C
IP Code	IP65 facade
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Tout isolant

Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data


Warranty period	5 years
Light beam spread	60°
Tiltable	Yes (30°)
Connection type	Connecteur rapide avec repiquage



FILE UPDATED ON 25/11/2022




Plan

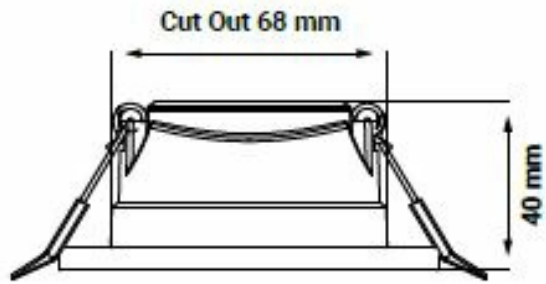

Accessories



Other

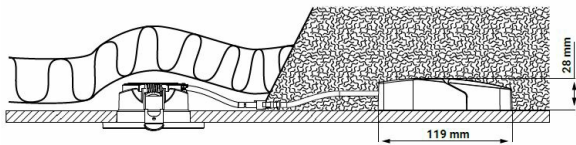

Other



FILE UPDATED ON 25/11/2022

