

PRISM LED PANEL

TF106 - PANEL V UGR19-PRISM CHANTIER X6 PCS-600X600-30W-4000K

BL04302001

INDOOR > Office Recessed Fixture

X6 packaging, designed for your construction sites. Led panel UGR≤ 19 with prismatic diffuser, safety rope and connection terminal block that can be transplanted without tools, PMMA lens. Anti-flicker driver compliant with new regulations.



Application domain

- Meeting room
- School
- Office



FILE UPDATED ON 08/02/2023

Electric data

Total power (W)	30
Rated voltage (V)	230V
Distorsion harmonique	<6%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	12
Max. lamp per B16A circuit breaker	20
Max. lamp per C16A circuit breaker	30

Photometric data

Color temperatures	4000K
UGR	<19
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>85
Safety group (EN62778)	RG0
Luminous flux (lm)	3400lm (4000K)
ULOR	-



FILE UPDATED ON 08/02/2023



Technical data

Dimensions (mm)	595 x 595 x 34
Recessed diameter (mm)	Min. : 600 Max. : 600
Weight (kg)	1.72
Recessed depth under BA13 (mm)	20
Cable length	-
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Insulation material except driver

Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data


Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	Bornier avec repiquage




FILE UPDATED ON 08/02/2023



Light distribution

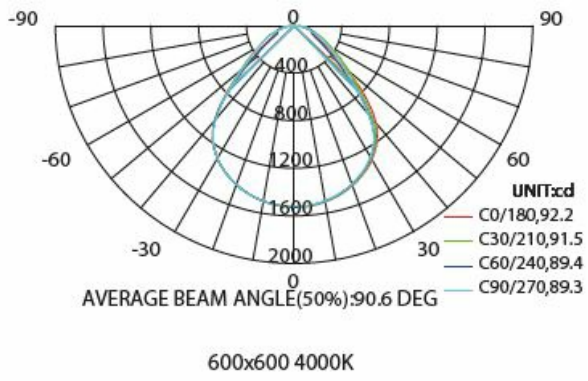


Photometric curves

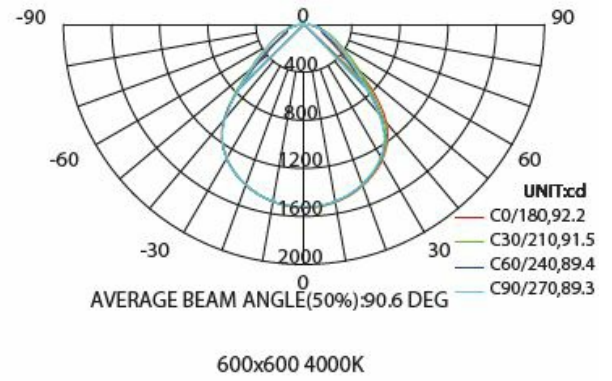

Other



Other

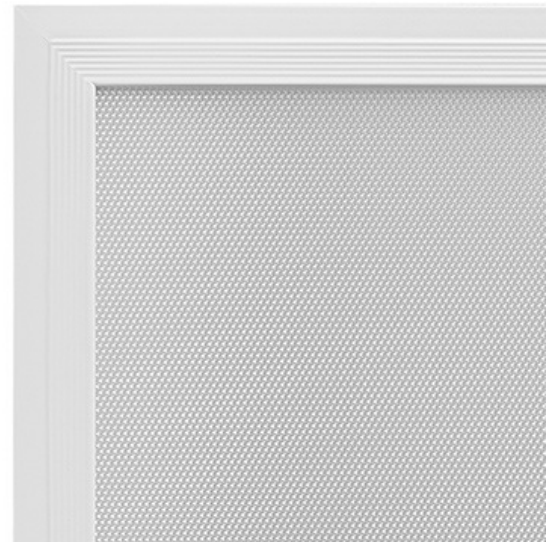

FILE UPDATED ON 08/02/2023

