




EXPLORER

COLLECTION

LOUDSPEAKERS FOR COASTAL LIVING.

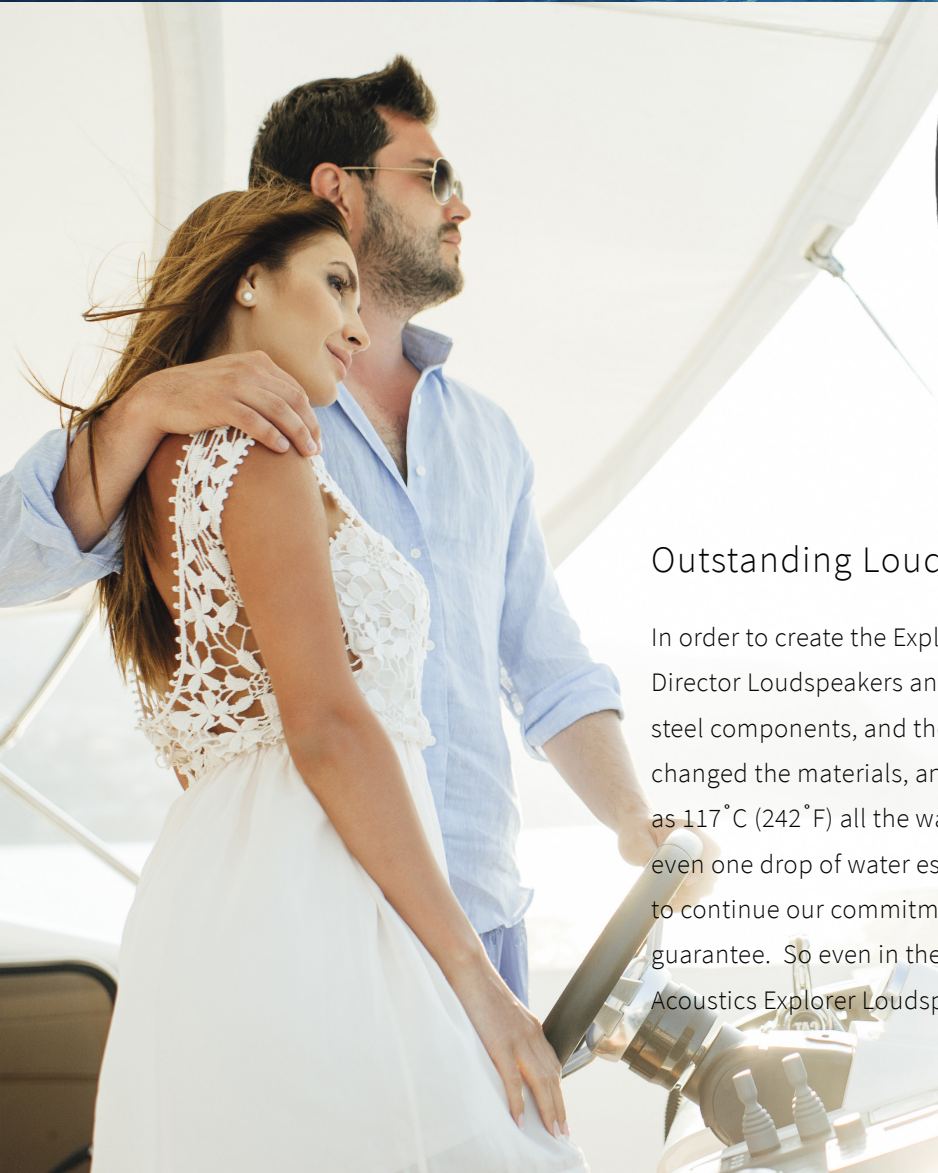

Outstanding Loudspeakers for Demanding Installations.

In order to create the Explorer Collection, we started with our award-winning Director Loudspeakers and dissected them. We've added seals, gaskets, stainless steel components, and then had the whole thing IP66 rated. To top that off, we've changed the materials, and the Explorer Series can withstand temperatures as high as 117°C (242°F) all the way down to -20°C (-4°F). We had to be thorough, because even one drop of water escaping into your ceiling or walls is unacceptable. Then, to continue our commitment to you, we've backed these speakers with our lifetime guarantee. So even in the most extreme environments, you can rest assured, Origin Acoustics Explorer Loudspeakers will perform for years to come.

Find out more at originacoustics.com

D65EX

- Woofer: 6 1/2" IMG Pivoting
- Tweeter: 1" Aluminum Pivoting
- Frequency Response: 45Hz-20kHz
- Power Handling: 25-140 Watts

- Diameter: 9 5/8" (244mm)
- Grille Diameter: 10" (254mm)
- Cutout Diameter: 8 3/4" (222mm)
- Mounting Depth: 4 9/16" (116mm)



C65EX

- Woofer: 4 x 8" IMG
- Tweeter: 1" Aluminum Pivoting
- Frequency Response: 45Hz-20kHz
- Power Handling: 25-110 Watts

- Dimensions: 5 1/2 x 11 3/4" (140 x 300mm)
- Grille Dimensions: 5 7/8 x 12 1/4" (149 x 311mm)
- Cutout Dimensions: 4 5/8 x 11" (118 x 278mm)
- Mounting Depth: 3 3/4" (95mm)



D83EX

- Woofer: 8" IMG
- Tweeter: 1" Aluminum
- Frequency Response: 38Hz-20kHz
- Power Handling: 50-125 Watts

- Diameter: 9 5/8" (244mm)
- Grille Diameter: 10" (254mm)
- Cutout Diameter: 8 3/4" (222mm)
- Mounting Depth: 4 1/8" (105mm)



D83DT/SUREX

- Woofer: 8" IMG
- Tweeter: Dual 1" Aluminum
- Frequency Response: 38Hz-20kHz
- Power Handling: 50-125 Watts

- Diameter: 9 5/8" (244mm)
- Grille Diameter: 10" (254mm)
- Cutout Diameter: 8 3/4" (222mm)
- Mounting Depth: 4 9/32" (109mm)



D83AEX

- Woofer: 8" IMG - Fixed Angle
- Tweeter: 1" Aluminum
- Frequency Response: 38Hz-20kHz
- Power Handling: 50-125 Watts

- Diameter: 9 5/8" (244mm)
- Grille Diameter: 10" (254mm)
- Cutout Diameter: 8 3/4" (222mm)
- Mounting Depth: 4 1/8" (105mm)



D85EX

- Woofer: 8" IMG
- Mid-Range: 4" IMG Multi-motion Pivoting
- Tweeter: 1" Aluminum Pivoting
- Frequency Response: 36Hz-20kHz
- Power Handling: 50-150Watts

- Diameter: 9 5/8" (244mm)
- Grille Diameter: 10" (254mm)
- Cutout Diameter: 8 3/4" (222mm)
- Mounting Depth: 5 19/32" (142mm)



D105EX

- Woofer: 10" IMG
- Mid-Range: 4" IMG Multi-motion Pivoting
- Tweeter: 1" Aluminum Pivoting
- Frequency Response: 28Hz-20kHz
- Power Handling: 50-175 Watts

- Diameter: 11 1/4" (286mm)
- Grille Diameter: 11 21/32" (296mm)
- Cutout Diameter: 10 3/8" (264mm)
- Mounting Depth: 6 7/32" (158mm)

