

STORM LOW GLARE 8W-IP20-40°-4000K- ROND-WHITE

TR01082004

INDOOR > Downlights (until 95 mm)

Low luminance LED recessed spotlight with very good visual comfort.



Application domain

- Residential indoor
- Bathroom
- Bedroom
- Home Office



8 W

700 lm

UGR
<19

IRC
>80

IP20

4000K



Electric data

Total power (W)	8
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	II
Dimmable	Triac

Photometric data

Color temperatures	4000K
UGR	<19
Light source type	COB
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	700lm (4000K)
ULOR	-

Technical data

Diameter (mm)	90
Height (mm)	95
Recessed diameter (mm)	Min. : 77 Max. : 85
Weight (kg)	0.28
Recessed depth under BA13 (mm)	95
Cable length	-
Product color	White
IK Code	IK06
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Non recouvrable


Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	5 years
Light beam spread	40°
Tiltable	No

Plan

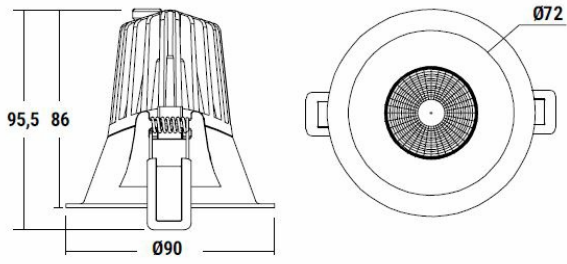

Atmosphere

