

## LED DOWNLIGHT

# CAMUS PRO 12W-IP44-3000K-WHITE

TR02124411B

**INDOOR** > Downlight (100 to 240 mm)

Round white aluminum downlight. Very thin and with wide light distribution, it is ideal for tertiary applications. Dali Push-Dim option with suitable driver.



### Application domain

- Circulations areas
- Cloakrooms
- Washrooms
- Shop



### Electric data

Total power (W)	12
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.95
Network frequencies	50Hz
Electric class	III
Dimmable	No



FILE UPDATED ON 29/11/2022

## Photometric data

Color temperatures	3000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	1140lm (3000K)
ULOR	-

## Technical data

Diameter (mm)	145
Height (mm)	13
Recessed diameter (mm)	Min. : 125   Max. : 130
Weight (kg)	0.26
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	White
IK Code	IK07
Incandescent wire test	650°C
IP Code	IP40 - IP44 facade
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PS
Driver included	Yes
Recoverable	Isolant rouleau



FILE UPDATED ON 29/11/2022



## Liefe time


L70 à 25°	50 000 h
-----------	----------

## Supplementary data

Warranty period	3 years
Light beam spread	110°
Tiltable	No
Connection type	Bornier avec repiquage
Linked products	<ul style="list-style-type: none"><li>• PL09002001B - DALI PUSH POWER SUPPLY Camus</li></ul>

## Other

---

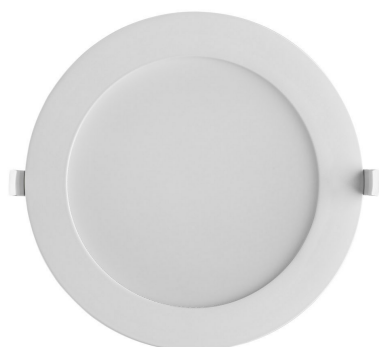

FILE UPDATED ON 29/11/2022