

HIBAY

TF118-HIBAY PRO-150W-4000K-IP65-SOSEN BL111506505

INDOOR > Surface mounted and suspended fixtures

INDOOR > Highbay

Led industrial frame, EEC eligible. Pre-equipped to receive the motion and light detector BL08000020B



Application domain

- Industrial facilities
- Production areas, assembly plant
- Storage



Electric data

Total power (W)	150
Rated voltage (V)	230V
Distorsion harmonique	<12%
Power factor	>0.95
Network frequencies	50Hz
Electric class	I
Dimmable	yes with sensor accessory



FILE UPDATED ON 21/11/2022

Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>85
Safety group (EN62778)	RG1
Luminous flux (lm)	19500lm (4000K)
ULOR	-

Technical data

Diameter (mm)	290
Height (mm)	172
Recessed diameter (mm)	-
Weight (kg)	3.32
Recessed depth under BA13 (mm)	-
Cable length	30 cm
Product color	Black
IK Code	IK08
Incandescent wire test	850°C
IP Code	IP65
Use temperature range	-25° ... +55°
Body material	Aluminium
Diffuser material	PC
Sensor	Haute fréquence
Driver included	Yes



FILE UPDATED ON 21/11/2022



Liefe time


L80 à 25°

50 000 h


Supplementary data

Warranty period	5 years
Light beam spread	120°
Tiltable	No
Connection type	Fil à connecter
Linked products	<ul style="list-style-type: none">• BL08000011 - TF057 High bay suspension chain• BL08000016 - HIGHBAY FIXING BRACKET• BL08000018 - 100W/150W PPMMA REFLECTOR• BL08000020 - TF168-MOTION DETECTOR• BL08000021 - TF169-REMOTE CONTROL FOR DETECT

Plan

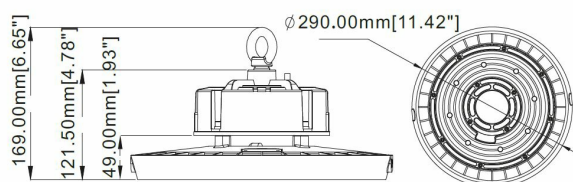

Light distribution

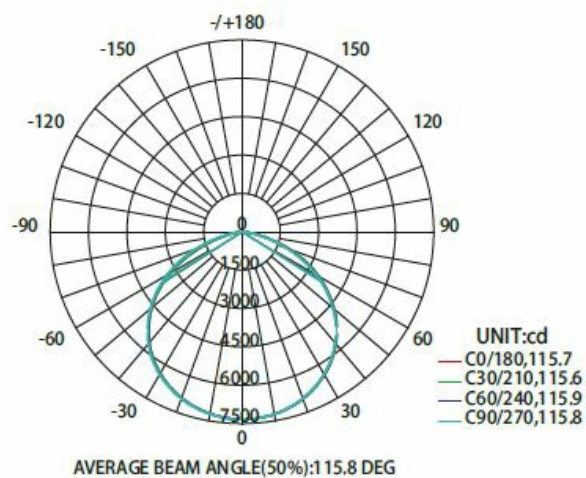

FILE UPDATED ON 21/11/2022





FILE UPDATED ON 21/11/2022



P2



FILE UPDATED ON 21/11/2022