

LED PANEL

TF090-PANEL ECO UGR 19-600x600-30W- 4000K-PRISM BACKLITE repiquable

BL04362004

INDOOR > Office Recessed Fixture

Led panel UGR<19 with prismatic diffuser, with safety rope and connection terminal block that can be transplanted without tools, PMMA lens.



Application domain

- Meeting room
- School
- Office
- Medical areas



30 W

3400
lmUGR
<19IRC
>85

IP40

4000K



Electric data

Total power (W)	30
Rated voltage (V)	230V
Distorsion harmonique	<6%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	10
Max. lamp per B16A circuit breaker	15
Max. lamp per C16A circuit breaker	25

Photometric data

Color temperatures	4000K
UGR	<19
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>85
Safety group (EN62778)	RG0
Luminous flux (lm)	3400lm (4000K)
ULOR	-

Technical data

Dimensions (mm)	595 x 595 x 34
Recessed diameter (mm)	Min. : 600 Max. : 600
Weight (kg)	2.04
Recessed depth under BA13 (mm)	20
Cable length	-
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP40
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Insulation material except driver

Liefe time


L80 à 25°	50 000 h
-----------	----------

Supplementary data


Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	Bornier avec repiquage
Linked products	<ul style="list-style-type: none">• BL08000013 - TF066-Protrusion frame 600x600• BL08000002 - TF018 Mechanically welded projection frame• BL08000009 - INTEGRATION FRAME 600x600



Light distribution

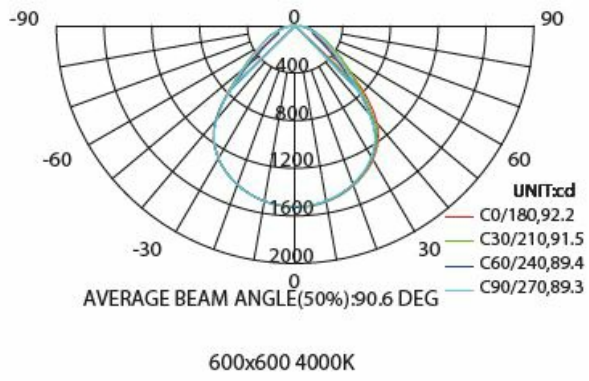

Photometric curves

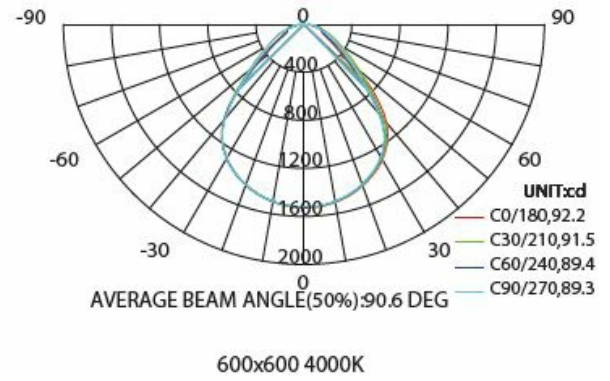

Other

