

DOME

DOME SUSP-50W-IP65-4000K-WHITE-DIM 1/10V

PL11506501

INDOOR > Surface mounted and suspended fixtures**INDOOR** > Highbay

Dimmable aluminum suspension in the shape of a dome. Perfectly suited to tertiary or commercial applications, this product allows real aesthetic integration in showrooms, stores and halls. Optional PC reflector.



Application domain

- Industrial facilities
- Production areas, assembly plant
- Storage
- Entrance Halls
- Shop



Electric data

Total power (W)	50
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.95
Network frequencies	50Hz
Electric class	I
Dimmable	1-10V

Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG1
Luminous flux (lm)	7000lm (4000K)
ULOR	-

Technical data

Diameter (mm)	391
Height (mm)	155
Recessed diameter (mm)	-
Weight (kg)	3.96
Recessed depth under BA13 (mm)	-
Cable length	20 cm
Product color	White
IK Code	IK08
Incandescent wire test	850°C
IP Code	IP65
Use temperature range	-25... +40°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes


Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	Fil à connecter
Linked products	<ul style="list-style-type: none">• PL11000001 - DOME ACC REFLECTOR PC• BL08000011 - TF057 High bay suspension chain

Plan

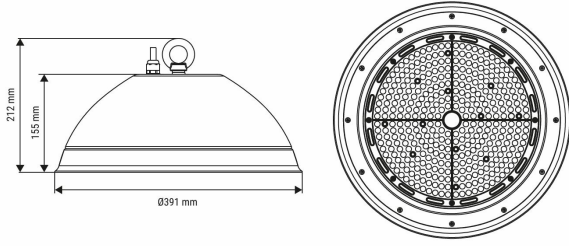

Accessories

